


System Contents:

- WM-5.6 WalkAbout III®** - 5.6" LCD Display
- LLC-1.4** - Low Light Color Camera
- T-FNS-14** - 14' Telescoping Pole
- BAT-2** - Two (2) NiMH Rechargeable Batteries
- WBC** - Battery Charger (Power Supply not shown)
- T-CASE** - Custom Carrying Case
- WUH** - Universal Chest Harness
- SS-WA-5.6** - Sunshade (Not shown)
- A/V Cable & Vehicle Power Adapter not shown

Recommended Additions:

- Videoscope**
 Gain visual access into rooms or compartments through openings as small as 1/4" (6mm).
- Baton**
 2 Ft. fixed length pole for access in confined spaces.
- D-BAT**
 Allows use of alkaline 'D' cells when the rechargeable batteries are not charged. Good for emergency situations.

SYSTEM PART NUMBERS:

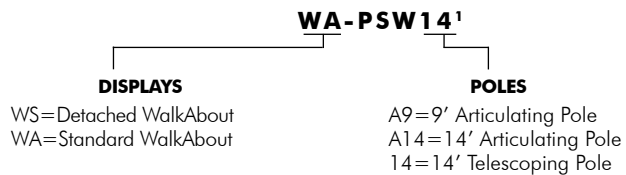

1) Add an '-N' to specify power supply blades for the US, UK, Europe, China, Australia, otherwise supplied with US blades only.



ALTERNATE DISPLAY CONFIGURATIONS





WalkAbout III Monitor

Display Size & Weight	Standard: 6.9"W x 9.4"H x 3.7"D / 3.5 lbs. (17.6 x 24 x 9.4cm / 1.58kg) Detached Base: 5.5"W x 3.7"H x 2.7"D / 1.5 lbs. (13.9 x 9.4 x 6.9cm / .66kg); LCD: 6.6"W x 7.5"H x 1.3"D / 2.5 lbs. (16.9 x 19.1 x 3.5cm / 1.13kg)
Construction	Rubber encapsulated aluminum case for shock resistance and weatherproofing
Display Size	5.6" (14.2cm) measured diagonally
Resolution	640 x 480
Operating Temperature	-4°F to 158°F (-20°C to 70°C)
LCD Controls	Brightness, contrast, color, tint, mirror, backlight & sharpness
Mounting Options	Display can be worn on vest, belt or harness; detached display can also be handheld
Video Format	Auto switches between NTSC (American) or PAL (European)
Charger	12VDC from either power supply or vehicle adapter
Batteries	NiMH, 7.2V, 2.7AH
Discharge Time/ Charge Time	2 hrs. with LEDs off / 2 hrs. when fully discharged
Base Controls & Indicators	On/Off switch & LED; Camera illumination control & LED; Low battery LED;
Connections	Camera (pole), A/V output, DC input (7.2V to 12V)

Camera		Poles		Cases	
Model	LLC-1.4	Model	T-FNS-14	Model	T-CASE
Construction	Submersible enclosure with hard-coated window	Construction	4 Section fiberglass telescoping	Construction	Rugged, watertight, plastic carry case with foam inserts having compartments for all components.
Size & Weight	1.6"D x 2.8"L / .28 lbs (4.1 x 7.1cm / .13kg)	Collars	Rugged, break-proof, easy grip, twist collars for each pole section.	Size	53" x 17" x 6" (135 x 43 x 15cm)
Features	9 Bright white LED illuminated, color camera, 480K pixels, .15 lux, 6.0mm lens, 47° FOV	Articulation	1 ft. flexible gooseneck can be flexed into any position.	Weight loaded	36 lbs. (16.3kg)
		Collapsed/ Extended Length	4 ft. / 13 ft. 11 in. (1.22M / 4.24M)		
		Weight	5.3 lbs. (2.4kg)		