

System Contents:

- WM-5.6 WalkAbout III®** - 5.6" LCD Display
- LLC-1.4** - Low Light Color Camera
- AP-T9** - 9' Telescoping/Articulating Pole
- BAT-2** - Two (2) NiMH Rechargeable Batteries
- WBC** - Battery Charger (Power Supply not shown)
- A-CASE** - Custom Carrying Case
- WUH** - Universal Chest Harness
- SS-WA-5.6** - Sunshade (Not shown)
- A/V Cable & Vehicle Power Adapter not shown

Recommended Additions:

- Videoscope**
 Gain visual access into rooms or compartments through openings as small as 1/4" (6mm).
- Baton**
 2 Ft. fixed length pole for access in confined spaces.
- D-BAT**
 Allows use of alkaline 'D' cells when the rechargeable batteries are not charged. Good for emergency situations.

SYSTEM PART NUMBERS:

WA - P S W - A 9¹

DISPLAYS

WS=Detached WalkAbout
 WA=Standard WalkAbout

POLES

A9=9' Articulating Pole
 A14=14' Articulating Pole
 14=14' Gooseneck Pole

1) Add an '-N' to specify power supply blades for the US, UK, Europe, China, Australia, otherwise supplied with US blades only.



A-CASE



AP-T9



STANDARD WALKABOUT



LLC-1.4



(2) BAT-2



WBC



WUH

ALTERNATE DISPLAY CONFIGURATIONS



DETACHED WALKABOUT



WalkAbout III Monitor

Display Size & Weight	Standard: 6.9"W x 9.4"H x 3.7"D / 3.5 lbs. (17.6 x 24 x 9.4cm / 1.58kg) Detached Base: 5.5"W x 3.7"H x 2.7"D / 1.5 lbs. (13.9 x 9.4 x 6.9cm / .66kg); LCD: 6.6"W x 7.5"H x 1.3"D / 2.5 lbs. (16.9 x 19.1 x 3.5cm / 1.13kg)
Construction	Rubber encapsulated aluminum case for shock resistance and weatherproofing
Display Size	5.6" (14.2cm) measured diagonally
Resolution	640 x 480
Operating Temperature	-4°F to 158°F (-20°C to 70°C)
LCD Controls	Brightness, contrast, color, tint, mirror, backlight & sharpness
Mounting Options	Display can be worn on vest, belt or harness; detached display can also be handheld
Video Format	Auto switches between NTSC (American) or PAL (European)
Charger	12VDC from either power supply or vehicle adapter
Batteries	NiMH, 7.2V, 2.7AH
Discharge Time/ Charge Time	2 hrs. with LEDs off / 2 hrs. when fully discharged
Base Controls & Indicators	On/Off switch & LED; Camera illumination control & LED; Low battery LED;
Connections	Camera (pole), A/V output, DC input (7.2V to 12V)

Camera		Poles		Cases	
Model	LLC-1.4	Model	AP-T9	Model	A-CASE
Construction	Submersible enclosure with hard-coated window	Construction	3 Section telescoping pole, 2 internal aluminum sections and an external fiberglass section with foam grip	Construction	Rugged, watertight, plastic carry case with foam inserts having compartments for all components.
Size & Weight	1.6"D x 2.8"L / .28 lbs (4.1 x 7.1cm / .13kg)	Collars	Rugged, break-proof, easy grip, twist collars for each pole section.	Size	53" x 17" x 6" (135 x 43 x 15cm)
Features	9 Bright white LED illuminated, color camera, 480K pixels, .15 lux, 6.0mm lens, 47° FOV	Articulation	Mechanical pull cable system operated by an easy-to-use twist handle. Camera range of ± 90° with detents. Twist collar allows camera angle to be locked at any position.	Weight loaded	37 lbs. (16.8kg)
		Collapsed/ Extended Length	4ft. 3in. / 8ft. 7in. (1.3M / 2.6M)		
		Weight	6.4 lbs. (2.9kg)		


System Contents:

- WM-5.6 WalkAbout III®** - 5.6" LCD Display
 - LLC-1.4** - Low Light Color Camera
 - T-FNS-11** - 11' Telescoping Pole
 - BAT-2** - Two (2) NiMH Rechargeable Batteries
 - WBC** - Battery Charger (Power Supply not shown)
 - S9-CASE** - Carrying Case for wand or pole (not shown)
 - W-CASE** - Carrying Case for all other components
 - WUH** - Universal Chest Harness
 - SS-WA-5.6** - Sunshade (Not shown)
- A/V Cable & Vehicle Power Adapter not shown

Recommended Additions:

- Videoscope**
 Gain visual access into rooms or compartments through openings as small as 1/4" (6mm).
- Baton**
 2 Ft. fixed length pole for access in confined spaces.
- D-BAT**
 Allows use of alkaline 'D' cells when the rechargeable batteries are not charged. Good for emergency situations.

SYSTEM PART NUMBERS:

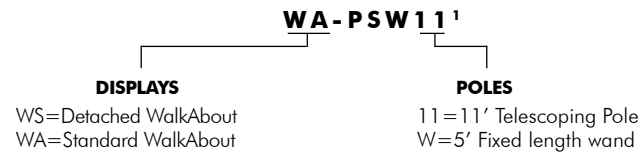

1) Add an '-N' to specify power supply blades for the US, UK, Europe, China, Australia, otherwise supplied with US blades only.



W-CASE



S9-CASE



T-FNS-11



STANDARD WALKABOUT



LLC-1.4



(2) BAT-2



WBC



WUH

ALTERNATE DISPLAY CONFIGURATIONS



DETACHED WALKABOUT



WalkAbout III Monitor

Display Size & Weight	Standard: 6.9"W x 9.4"H x 3.7"D / 3.5 lbs. (17.6 x 24 x 9.4cm / 1.58kg) Detached Base: 5.5"W x 3.7"H x 2.7"D / 1.5 lbs. (13.9 x 9.4 x 6.9cm / .66kg); LCD: 6.6"W x 7.5"H x 1.3"D / 2.5 lbs. (16.9 x 19.1 x 3.5cm / 1.13kg)
Construction	Rubber encapsulated aluminum case for shock resistance and weatherproofing
Display Size	5.6" (14.2cm) measured diagonally
Resolution	640 x 480
Operating Temperature	-4°F to 158°F (-20°C to 70°C)
LCD Controls	Brightness, contrast, color, tint, mirror, backlight & sharpness
Mounting Options	Display can be worn on vest, belt or harness; detached display can also be handheld
Video Format	Auto switches between NTSC (American) or PAL (European)
Charger	12VDC from either power supply or vehicle adapter
Batteries	NiMH, 7.2V, 2.7AH
Discharge Time/ Charge Time	2 hrs. with LEDs off / 2 hrs. when fully discharged
Base Controls & Indicators	On/Off switch & LED; Camera illumination control & LED; Low battery LED;
Connections	Camera (pole), A/V output, DC input (7.2V to 12V)

Camera		Pole		Cases	
Model	LLC-1.4	Model	T-FNS-11	Model	W-CASE
Construction	Submersible enclosure with hard-coated window	Construction	3 Section telescoping fiberglass pole	Stores	WalkAbout III, camera and accessories
Size & Weight	1.6"D x 2.8"L / .28 lbs (4.1 x 7.1cm / .13kg)	Collars	Rugged, break-proof, easy grip, twist collars for each pole section.	Construction	Rugged, watertight, plastic carry case with foam inserts having compartments for all components.
Features	9 Bright white LED illuminated, color camera, 480K pixels, .15 lux, 6.0mm lens, 47° FOV	Articulation	1 ft. flexible gooseneck can be flexed into any position.	Size	21" x 16" x 8" (53 x 41 x 20cm)
		Collapsed/ Extended Length	4ft. / 10ft. 11in. (1.22M / 3.33M)	Weight loaded	17 lbs. (7.7kg)
		Weight	4.1 lbs. (1.9kg)	Model	S-9 CASE
				Stores	T-FNS-11
				Construction	Soft padded carry case for pole
				Size	54" x 8" x 2" (137 x 20 x 5cm)
				Weight loaded	5 lbs. (2.7kg)

System Contents:

- WM-5.6 WalkAbout III®** - 5.6" LCD Display
- LLC-1.4** - Low Light Color Camera
- AP-T14** - 14' Telescoping/Articulating Pole
- BAT-2** - Two (2) NiMH Rechargeable Batteries
- WBC** - Battery Charger (Power Supply not shown)
- T-CASE** - Custom Carrying Case
- WUH** - Universal Chest Harness
- SS-WA-5.6** - Sunshade (Not shown)
- A/V Cable & Vehicle Power Adapter not shown

Recommended Additions:

- Videoscope**
 Gain visual access into rooms or compartments through openings as small as 1/4" (6mm).
- Baton**
 2 Ft. fixed length pole for access in confined spaces.
- D-BAT**
 Allows use of alkaline 'D' cells when the rechargeable batteries are not charged. Good for emergency situations.

SYSTEM PART NUMBERS:

WA - P S W - A 1 4¹

DISPLAYS

WS=Detached WalkAbout
 WA=Standard WalkAbout

POLES

A9=9' Articulating Pole
 A14=14' Articulating Pole
 14=14' Telescoping Pole



T-CASE



AP-T14



STANDARD WALKABOUT



LLC-1.4



(2) BAT-2



WBC



WUH

ALTERNATE DISPLAY CONFIGURATIONS



DETACHED WALKABOUT

1) Add an '-N' to specify power supply blades for the US, UK, Europe, China, Australia, otherwise supplied with US blades only.



WalkAbout III Monitor

Display Size & Weight	Standard: 6.9"W x 9.4"H x 3.7"D / 3.5 lbs. (17.6 x 24 x 9.4cm / 1.58kg) Detached Base: 5.5"W x 3.7"H x 2.7"D / 1.5 lbs. (13.9 x 9.4 x 6.9cm / .66kg); LCD: 6.6"W x 7.5"H x 1.3"D / 2.5 lbs. (16.9 x 19.1 x 3.5cm / 1.13kg)
Construction	Rubber encapsulated aluminum case for shock resistance and weatherproofing
Display Size	5.6" (14.2cm) measured diagonally
Resolution	640 x 480
Operating Temperature	-4°F to 158°F (-20°C to 70°C)
LCD Controls	Brightness, contrast, color, tint, mirror, backlight & sharpness
Mounting Options	Display can be worn on vest, belt or harness; detached display can also be handheld
Video Format	Auto switches between NTSC (American) or PAL (European)
Charger	12VDC from either power supply or vehicle adapter
Batteries	NiMH, 7.2V, 2.7AH
Discharge Time/ Charge Time	2 hrs. with LEDs off / 2 hrs. when fully discharged
Base Controls & Indicators	On/Off switch & LED; Camera illumination control & LED; Low battery LED;
Connections	Camera (pole), A/V output, DC input (7.2V to 12V)

Camera		Poles		Cases	
Model	LLC-1.4	Model	AP-T14	Model	T-CASE
Construction	Submersible enclosure with hard-coated window	Construction	6 Section telescoping pole, 5 internal aluminum and an external fiberglass section with foam grip	Construction	Rugged, watertight, plastic carry case with foam inserts having compartments for all components.
Size & Weight	1.6"D x 2.8"L / .28 lbs (4.1 x 7.1cm / .13kg)	Collars	Rugged, break-proof, easy grip, twist collars for each pole section.	Size	53" x 17" x 6" (135 x 43 x 15cm)
Features	9 Bright white LED illuminated, color camera, 480K pixels, .15 lux, 6.0mm lens, 47° FOV	Articulation	Mechanical pull cable system operated by an easy-to-use twist handle. Camera range of ± 90° with detents. Twist collar allows camera angle to be locked at any position.	Weight loaded	38 lbs. (17.2kg)
		Collapsed/ Extended Length	4ft. 1in. / 14ft. 1in. (1.24M / 4.29M)		
		Weight	8.1 lbs. (3.67kg)		


System Contents:

- WM-5.6 WalkAbout III®** - 5.6" LCD Display
- LLC-1.4** - Low Light Color Camera
- T-FNS-14** - 14' Telescoping Pole
- BAT-2** - Two (2) NiMH Rechargeable Batteries
- WBC** - Battery Charger (Power Supply not shown)
- T-CASE** - Custom Carrying Case
- WUH** - Universal Chest Harness
- SS-WA-5.6** - Sunshade (Not shown)
- A/V Cable & Vehicle Power Adapter not shown

Recommended Additions:

- Videoscope**
 Gain visual access into rooms or compartments through openings as small as 1/4" (6mm).
- Baton**
 2 Ft. fixed length pole for access in confined spaces.
- D-BAT**
 Allows use of alkaline 'D' cells when the rechargeable batteries are not charged. Good for emergency situations.

SYSTEM PART NUMBERS:

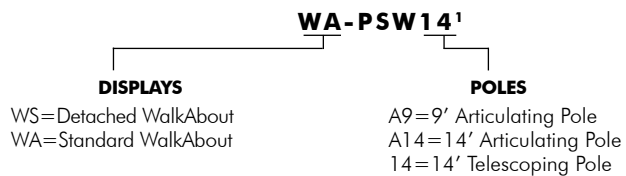

1) Add an '-N' to specify power supply blades for the US, UK, Europe, China, Australia, otherwise supplied with US blades only.



ALTERNATE DISPLAY CONFIGURATIONS





WalkAbout III Monitor

Display Size & Weight	Standard: 6.9"W x 9.4"H x 3.7"D / 3.5 lbs. (17.6 x 24 x 9.4cm / 1.58kg) Detached Base: 5.5"W x 3.7"H x 2.7"D / 1.5 lbs. (13.9 x 9.4 x 6.9cm / .66kg); LCD: 6.6"W x 7.5"H x 1.3"D / 2.5 lbs. (16.9 x 19.1 x 3.5cm / 1.13kg)
Construction	Rubber encapsulated aluminum case for shock resistance and weatherproofing
Display Size	5.6" (14.2cm) measured diagonally
Resolution	640 x 480
Operating Temperature	-4°F to 158°F (-20°C to 70°C)
LCD Controls	Brightness, contrast, color, tint, mirror, backlight & sharpness
Mounting Options	Display can be worn on vest, belt or harness; detached display can also be handheld
Video Format	Auto switches between NTSC (American) or PAL (European)
Charger	12VDC from either power supply or vehicle adapter
Batteries	NiMH, 7.2V, 2.7AH
Discharge Time/ Charge Time	2 hrs. with LEDs off / 2 hrs. when fully discharged
Base Controls & Indicators	On/Off switch & LED; Camera illumination control & LED; Low battery LED;
Connections	Camera (pole), A/V output, DC input (7.2V to 12V)

Camera		Poles		Cases	
Model	LLC-1.4	Model	T-FNS-14	Model	T-CASE
Construction	Submersible enclosure with hard-coated window	Construction	4 Section fiberglass telescoping	Construction	Rugged, watertight, plastic carry case with foam inserts having compartments for all components.
Size & Weight	1.6"D x 2.8"L / .28 lbs (4.1 x 7.1cm / .13kg)	Collars	Rugged, break-proof, easy grip, twist collars for each pole section.	Size	53" x 17" x 6" (135 x 43 x 15cm)
Features	9 Bright white LED illuminated, color camera, 480K pixels, .15 lux, 6.0mm lens, 47° FOV	Articulation	1 ft. flexible gooseneck can be flexed into any position.	Weight loaded	36 lbs. (16.3kg)
		Collapsed/ Extended Length	4 ft. / 13 ft. 11 in. (1.22M / 4.24M)		
		Weight	5.3 lbs. (2.4kg)		


System Contents:

- WM-5.6 WalkAbout III[®]** - 5.6" LCD Display
 - LLC-1.4** - Low Light Color Camera
 - W-FNS** - 5' Fixed Length Pole
 - BAT-2** - Two (2) NiMH Rechargeable Batteries
 - WBC** - Battery Charger (Power Supply not shown)
 - S9-CASE** - Carrying Case for wand or pole (not shown)
 - W-CASE** - Carrying Case for all other components
 - WUH** - Universal Chest Harness
 - SS-WA-5.6** - Sunshade (Not shown)
- A/V Cable & Vehicle Power Adapter not shown

Recommended Additions:

- Videoscope**
 Gain visual access into rooms or compartments through openings as small as 1/4" (6mm).
- Baton**
 2 Ft. fixed length pole for access in confined spaces.
- D-BAT**
 Allows use of alkaline 'D' cells when the rechargeable batteries are not charged. Good for emergency situations.

SYSTEM PART NUMBERS:

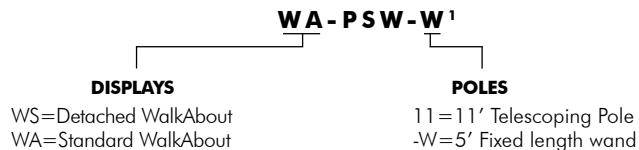

1) Add an '-N' to specify power supply blades for the US, UK, Europe, China, Australia, otherwise supplied with US blades only.



W-CASE



W-FNS



S9-CASE



STANDARD WALKABOUT



LLC-1.4



(2) BAT-2



WBC



WUH

ALTERNATE DISPLAY CONFIGURATIONS



DETACHED WALKABOUT



WalkAbout III Monitor

Display Size & Weight	Standard: 6.9"W x 9.4"H x 3.7"D / 3.5 lbs. (17.6 x 24 x 9.4cm / 1.58kg) Detached Base: 5.5"W x 3.7"H x 2.7"D / 1.5 lbs. (13.9 x 9.4 x 6.9cm / .66kg); LCD: 6.6"W x 7.5"H x 1.3"D / 2.5 lbs. (16.9 x 19.1 x 3.5cm / 1.13kg)
Construction	Rubber encapsulated aluminum case for shock resistance and weatherproofing
Display Size	5.6" (14.2cm) measured diagonally
Resolution	640 x 480
Operating Temperature	-4°F to 158°F (-20°C to 70°C)
LCD Controls	Brightness, contrast, color, tint, mirror, backlight & sharpness
Mounting Options	Display can be worn on vest, belt or harness; detached display can also be handheld
Video Format	Auto switches between NTSC (American) or PAL (European)
Charger	12VDC from either power supply or vehicle adapter
Batteries	NiMH, 7.2V, 2.7AH
Discharge Time/ Charge Time	2 hrs. with LEDs off / 2 hrs. when fully discharged
Base Controls & Indicators	On/Off switch & LED; Camera illumination control & LED; Low battery LED;
Connections	Camera (pole), A/V output, DC input (7.2V to 12V)

Camera		Pole		Cases	
Model	LLC-1.4	Model	W-FNS	Model	W-CASE
Construction	Submersible enclosure with hard-coated window	Construction	Single section fixed length fiberglass pole with foam grip	Stores	WalkAbout III, camera and accessories
Size & Weight	1.6"D x 2.8"L / .28 lbs (4.1 x 7.1 cm / .13kg)	Collars	None	Construction	Rugged, watertight, plastic carry case with foam inserts having compartments for all components.
Features	9 Bright white LED illuminated, color camera, 480K pixels, .15 lux, 6.0mm lens, 47° FOV	Articulation	1 ft. flexible gooseneck can be flexed into any position	Size	21" x 16" x 8" (53 x 41 x 20cm)
		Collapsed/ Extended Length	4ft. / 5ft. 2in. (1.22M / 1.57M)	Weight loaded	17 lbs. (7.7kg)
		Weight	2.5 lbs. (1.1kg)	Model	S-9 CASE
				Stores	W-FNS
				Construction	Soft padded carry case for pole
				Size	54" x 8" x 2" (137 x 20 x 5cm)
				Weight loaded	3.4 lbs. (1.54kg)

System Contents:

WM-5.6 WalkAbout III[®] - 5.6" LCD Display

LLC-1.4 - Low Light Color Camera

B-FNS - 2' Baton

BAT-2 - Two (2) NiMH Rechargeable Batteries

WBC - Battery Charger (Power Supply not shown)

W-CASE - Carrying Case for all other components

WUH - Universal Chest Harness

SS-WA-5.6 - Sunshade (Not shown)

A/V Cable & Vehicle Power Adapter not shown

Recommended Additions:

Telescoping Pole

Extended reach with either an articulating or telescoping pole. Sizes range from 5' to 20'.

D-BAT

Allows use of alkaline 'D' cells when the rechargeable batteries are not charged. Good for emergency situations.



W-CASE



B-FNS



STANDARD WALKABOUT



LLC-1.4



(2) BAT-2



WBC



WUH

SYSTEM PART NUMBERS:

WA - CBW¹

DISPLAYS

WS=Detached WalkAbout
 WA=Standard WalkAbout

1) Add an '-N' to specify power supply blades for the US, UK, Europe, China, Australia, otherwise supplied with US blades only.

ALTERNATE DISPLAY CONFIGURATIONS



DETACHED WALKABOUT



WalkAbout III Monitor

Display Size & Weight	Standard: 6.9"W x 9.4"H x 3.7"D / 3.5 lbs. (17.6 x 24 x 9.4cm / 1.58kg) Detached Base: 5.5"W x 3.7"H x 2.7"D / 1.5 lbs. (13.9 x 9.4 x 6.9cm / .66kg); LCD: 6.6"W x 7.5"H x 1.3"D / 2.5 lbs. (16.9 x 19.1 x 3.5cm / 1.13kg)
Construction	Rubber encapsulated aluminum case for shock resistance and weatherproofing
Display Size	5.6" (14.2cm) measured diagonally
Resolution	640 x 480
Operating Temperature	-4°F to 158°F (-20°C to 70°C)
LCD Controls	Brightness, contrast, color, tint, mirror, backlight & sharpness
Mounting Options	Display can be worn on vest, belt or harness; detached display can also be handheld
Video Format	Auto switches between NTSC (American) or PAL (European)
Charger	12VDC from either power supply or vehicle adapter
Batteries	NiMH, 7.2V, 2.7AH
Discharge Time/ Charge Time	2 hrs. with LEDs off / 2 hrs. when fully discharged
Base Controls & Indicators	On/Off switch & LED; Camera illumination control & LED; Low battery LED;
Connections	Camera (pole), A/V output, DC input (7.2V to 12V)

Camera		Pole		Cases	
Model	LLC-1.4	Model	B-FNS	Model	W-CASE
Construction	Submersible enclosure with hard-coated window	Construction	Single section fixed length fiberglass pole with foam grip	Stores	WalkAbout III, camera and accessories
Size & Weight	1.6"D x 2.8"L / .28 lbs (4.1 x 7.1 cm / .13kg)	Collars	None	Construction	Rugged, watertight, plastic carry case with foam inserts having compartments for all components.
Features	9 Bright white LED illuminated, color camera, 480K pixels, .15 lux, 6.0mm lens, 47° FOV	Articulation	1 ft. flexible gooseneck baton can be flexed into any position	Size	21" x 16" x 8" (53 x 41 x 20cm)
		Collapsed/ Extended Length	1ft. 3in. / 2ft. 1in. (1.3M / 2.6M)	Weight loaded	17 lbs. (7.7kg)
		Weight	1.4 lbs. (2.9kg)		



System Contents:

- WM-5.6 WalkAbout III®** - 5.6" LCD Display
 - LLC-1.4** - Two (2) Low Light Color Cameras
 - WPC-3.5** - Wide Angle Color Cameras
 - B-FNS** - 2' Baton
 - T-FNS-14** - 14' Telescoping Pole
 - RW** - 6' Rigid Wand for UVIT
 - UVIT** - Under Vehicle Inspection Trolley
 - BAT-2** - Two (2) NiMH Rechargeable Batteries
 - WBC** - Battery Charger (Power Supply not shown)
 - V-CASE** - Custom Carrying Case
 - WUH** - Universal Chest Harness
 - SS-WA-5.6** - Sunshade (Not shown)
- A/V Cable & Vehicle Power Adapter not shown

Recommended Additions:

- Fiberscope**
Gain visual access into compartments through openings as small as 1/4" (6mm).
- Dual Mode Thermal Camera**
Locate hidden compartments by detecting a change in temperature.

SYSTEM PART NUMBERS:

WA - VSWD14¹

DISPLAYS

WS=Detached WalkAbout
 WA=Standard WalkAbout

MODELS

D14=Includes B-FNS & (2) LLC-1.4 Cameras
 14=No B-FNS and (1) LLC-1.4 Camera
 L= No pole, no B-FNS and (1) LLC-1.4 Camera

1) Add an '-N' to specify power supply blades for the US, UK, Europe, China, Australia, otherwise supplied with US blades only.



T-FNS-14



RW



STANDARD WALKABOUT



(2) LLC-1.4



WPC-3.5



B-FNS



(2) BAT-2



WBC



WUH

ALTERNATE DISPLAY CONFIGURATIONS



DETACHED WALKABOUT



WalkAbout III Monitor

Display Size & Weight	Standard: 6.9"W x 9.4"H x 3.7"D / 3.5 lbs. (17.6 x 24 x 9.4cm / 1.58kg) Detached Base: 5.5"W x 3.7"H x 2.7"D / 1.5 lbs. (13.9 x 9.4 x 6.9cm / .66kg); LCD: 6.6"W x 7.5"H x 1.3"D / 2.5 lbs. (16.9 x 19.1 x 3.5cm / 1.13kg)
Construction	Rubber encapsulated aluminum case for shock resistance and weatherproofing
Display Size	5.6" (14.2cm) measured diagonally
Resolution	640 x 480
Operating Temperature	-4°F to 158°F (-20°C to 70°C)
LCD Controls	Brightness, contrast, color, tint, mirror, backlight & sharpness
Mounting Options	Display can be worn on vest, belt or harness; detached display can also be handheld
Video Format	Auto switches between NTSC (American) or PAL (European)
Charger	12VDC from either power supply or vehicle adapter
Batteries	NiMH, 7.2V, 2.7AH
Discharge Time/ Charge Time	2 hrs. with LEDs off / 2 hrs. when fully discharged
Base Controls & Indicators	On/Off switch & LED; Camera illumination control & LED; Low battery LED;
Connections	Camera (pole), A/V output, DC input (7.2V to 12V)

Cameras			Case	
Model	LLC-1.4 Camera	WPC-3.5	Model	V-CASE
Construction	Submersible enclosure with hard-coated window	Submersible, non-conductive enclosure with hard-coated window	Construction	Rugged, watertight, plastic carry case with foam inserts having compartments for all components.
Size & Weight	1.6"D x 2.8"L / .28 lbs (4.1 x 7.1cm / .13kg)	2.5"D x 2.6"L / .36 lbs. (6.4 x 6.6cm / .16kg)	Size	53" x 17" x 6" (135 x 43 x 15cm)
Features	9 Bright white LED illuminated, color camera, 480K pixels, .15 lux, 6.0mm lens, 47° FOV	24 Bright white LED illuminated, color camera, 380K pixels (438K/PAL), .03 lux, 3.6 mm, 92° FOV	Weight loaded	46 lbs. (20.8kg)

Poles			
Model	UVIT (Under Vehicle Inspection Trolley)	B-FNS	T-FNS-14
Construction	3 Section telescoping fiberglass detachable handle (RW-8). Rugged, aluminum trolley with 4 wheels on Trolley.	Fixed length fiberglass pole with hand grip	4 Section fiberglass telescoping
Collars	Rugged, break-proof, easy grip, twist collars for each pole section.	None	Rugged, break-proof, easy grip, twist collars for each pole section.
Articulation	Rotating handle rotates camera	1 ft. flexible gooseneck can be flexed into any position	
Collapsed/ Extended Length	Rigid Wand (RW-8): 3 ft / 7 ft 6 in. (.91M / 2.28M); Trolley (UVIT): 1ft. 9 in. (.53M)	1ft. 3in. / 2ft. 1in. (1.3M / 2.6M)	4 ft. / 13 ft. 11 in. (1.22M / 4.24M)
Weight	7.8 lbs. (combined) (3.5kg)	1.4 lbs. (2.9kg)	5.3 lbs. (2.4kg)

System Contents:

- WM-5.6 WalkAbout III**[®] - 5.6" LCD Display
- LLC-1.4** - Low Light Color Cameras
- WPC-3.5** - Wide Angle Color Cameras
- T-FNS-14** - 14' Telescoping Pole
- RW** - 6' Rigid Wand for UVIT
- UVIT** - Under Vehicle Inspection Trolley
- BAT-2** - Two (2) NiMH Rechargeable Batteries
- WBC** - Battery Charger (Power Supply not shown)
- V-CASE** - Custom Carrying Case
- WUH** - Universal Chest Harness
- SS-WA-5.6** - Sunshade (Not shown)
- A/V Cable & Vehicle Power Adapter not shown

Recommended Additions:

- Fiberscope**
 Gain visual access into compartments through openings as small as 1/4" (6mm).
- Dual Mode Thermal Camera**
 Locate hidden compartments by detecting a change in temperature.

SYSTEM PART NUMBERS:

WA - VSW14¹

DISPLAYS

WS=Detached WalkAbout
 WA=Standard WalkAbout

MODELS

D14=Includes B-FNS & (2) LLC-1.4 Cameras
 14=No B-FNS and (1) LLC-1.4 Camera
 L= No pole, no B-FNS and (1) LLC-1.4 Camera

1) Add an '-N' to specify power supply blades for the US, UK, Europe, China, Australia, otherwise supplied with US blades only.



V-CASE

UVIT



T-FNS-14

RW



STANDARD WALKABOUT

LLC-1.4

WPC-3.5

(2) BAT-2

WBC

WUH

ALTERNATE DISPLAY CONFIGURATIONS





WalkAbout III Monitor

Display Size & Weight	Standard: 6.9"W x 9.4"H x 3.7"D / 3.5 lbs. (17.6 x 24 x 9.4cm / 1.58kg) Detached Base: 5.5"W x 3.7"H x 2.7"D / 1.5 lbs. (13.9 x 9.4 x 6.9cm / .66kg); LCD: 6.6"W x 7.5"H x 1.3"D / 2.5 lbs. (16.9 x 19.1 x 3.5cm / 1.13kg)
Construction	Rubber encapsulated aluminum case for shock resistance and weatherproofing
Display Size	5.6" (14.2cm) measured diagonally
Resolution	640 x 480
Operating Temperature	-4°F to 158°F (-20°C to 70°C)
LCD Controls	Brightness, contrast, color, tint, mirror, backlight & sharpness
Mounting Options	Display can be worn on vest, belt or harness; detached display can also be handheld
Video Format	Auto switches between NTSC (American) or PAL (European)
Charger	12VDC from either power supply or vehicle adapter
Batteries	NiMH, 7.2V, 2.7AH
Discharge Time/ Charge Time	2 hrs. with LEDs off / 2 hrs. when fully discharged
Base Controls & Indicators	On/Off switch & LED; Camera illumination control & LED; Low battery LED;
Connections	Camera (pole), A/V output, DC input (7.2V to 12V)

Cameras			Case	
Model	LLC-1.4 Camera	WPC-3.5	Model	V-CASE
Construction	Submersible enclosure with hard-coated window	Submersible, non-conductive enclosure with hard-coated window	Construction	Rugged, watertight, plastic carry case with foam inserts having compartments for all components.
Size & Weight	1.6"D x 2.8"L / .28 lbs (4.1 x 7.1cm / .13kg)	2.5"D x 2.6"L / .36 lbs. (6.4 x 6.6cm / .16kg)	Size	53" x 17" x 6" (135 x 43 x 15cm)
Features	9 Bright white LED illuminated, color camera, 480K pixels, .15 lux, 6.0mm lens, 47° FOV	24 Bright white LED illuminated, color camera, 380K pixels (438K/PAL), .05 lux, 3.6 mm, 92° FOV	Weight loaded	45 lbs. (20.4kg)

Poles		
Model	UVIT (Under Vehicle Inspection Trolley)	T-FNS-14
Construction	3 Section telescoping fiberglass detachable handle (RW-8). Rugged, aluminum trolley with 4 wheels on Trolley.	4 Section fiberglass telescoping
Collars	Rugged, break-proof, easy grip, twist collars for each pole section.	
Articulation	Rotating handle rotates camera	1 ft. flexible gooseneck can be flexed into any position
Collapsed/ Extended Length	Rigid Wand (RW-8): 3 ft / 7 ft 6 in. (.91M / 2.28M); Trolley (UVIT): 1ft. 9 in. (.53M)	4 ft. / 13 ft. 11 in. (1.22M / 4.24M)
Weight	7.8 lbs. (combined) (3.5kg)	5.3 lbs. (2.4kg)

System Contents:

- WM-5.6 WalkAbout III**[®] - 5.6" LCD Display
- WPC-3.5** - Wide Angle Color Cameras
- RW** - 6' Rigid Wand for UVIT
- UVIT** - Under Vehicle Inspection Trolley
- BAT-2** - Two (2) NiMH Rechargeable Batteries
- WBC** - Battery Charger (Power Supply not shown)
- V-CASE** - Custom Carrying Case
- WUH** - Universal Chest Harness
- SS-WA-5.6** - Sunshade (Not shown)
- A/V Cable & Vehicle Power Adapter not shown

Recommended Additions:

- Fiberscope**
 Gain visual access into compartments through openings as small as 1/4" (6mm).
- Dual Mode Thermal Camera**
 Locate hidden compartments by detecting a change in temperature.

SYSTEM PART NUMBERS:

WA - VSWL¹

DISPLAYS

WS=Detached WalkAbout
 WA=Standard WalkAbout

1) Add an '-N' to specify power supply blades for the US, UK, Europe, China, Australia, otherwise supplied with US blades only.



Picture contains items not included in kit.



RW



STANDARD WALKABOUT



WPC-3.5



(2) BAT-2



WUH

ALTERNATE DISPLAY CONFIGURATIONS



DETACHED WALKABOUT



WalkAbout III Monitor

Display Size & Weight	Standard: 6.9"W x 9.4"H x 3.7"D / 3.5 lbs. (17.6 x 24 x 9.4cm / 1.58kg) Detached Base: 5.5"W x 3.7"H x 2.7"D / 1.5 lbs. (13.9 x 9.4 x 6.9cm / .66kg); LCD: 6.6"W x 7.5"H x 1.3"D / 2.5 lbs. (16.9 x 19.1 x 3.5cm / 1.13kg)
Construction	Rubber encapsulated aluminum case for shock resistance and weatherproofing
Display Size	5.6" (14.2cm) measured diagonally
Resolution	640 x 480
Operating Temperature	-4°F to 158°F (-20°C to 70°C)
LCD Controls	Brightness, contrast, color, tint, mirror, backlight & sharpness
Mounting Options	Display can be worn on vest, belt or harness; detached display can also be handheld
Video Format	Auto switches between NTSC (American) or PAL (European)
Charger	12VDC from either power supply or vehicle adapter
Batteries	NiMH, 7.2V, 2.7AH
Discharge Time/ Charge Time	2 hrs. with LEDs off / 2 hrs. when fully discharged
Base Controls & Indicators	On/Off switch & LED; Camera illumination control & LED; Low battery LED;
Connections	Camera (pole), A/V output, DC input (7.2V to 12V)

Camera		Case	
Model	WPC-3.5	Model	V-CASE
Construction	Submersible, non-conductive enclosure with hard-coated window	Construction	Rugged, watertight, plastic carry case with foam inserts having compartments for all components.
Size & Weight	2.5"D x 2.6"L / .36 lbs. (6.4 x 6.6cm / .16kg)	Size	53" x 17" x 6" (135 x 43 x 15cm)
Features	24 Bright white LED illuminated, color camera, 380K pixels (438K/PAL), .05 lux, 3.6 mm, 92° FOV	Weight loaded	37 lbs. (16.8kg)

Poles

Model	UVIT (Under Vehicle Inspection Trolley)
Construction	3 Section telescoping fiberglass detachable handle (RW-8); Rugged aluminum trolley with 4 wheels on Trolley.
Collars	Rugged, break-proof, easy grip, twist collars for each pole section.
Articulation	Rotating handle rotates camera
Collapsed/ Extended Length	Rigid Wand (RW-8): 3 ft / 7 ft 6 in. (.91M / 2.28M); Trolley (UVIT): 1ft. 9 in. (.53M)
Weight	7.8 lbs. (combined) (3.5kg)



System Contents:

- WM-5.6 WalkAbout III**[®] - 5.6" LCD Display
- LLC-1.4** - Two (2) Low Light Color Cameras
- WPC-3.5** - Wide Angle Color Cameras
- B-FNS** - 2' Baton
- T-FNS-14** - 14' Telescoping Pole
- RW** - 6' Rigid Wand for UVIT or SLED
- UVIT** - Under Vehicle Inspection Trolley
- SLED** - Under Vehicle Inspection Sled
- BAT-2** - Two (2) NiMH Rechargeable Batteries
- WBC** - Battery Charger (Power Supply not shown)
- V-CASE** - Custom Carrying Case
- WUH** - Universal Chest Harness
- SS-WA-5.6** - Sunshade (Not shown)
- A/V Cable & Vehicle Power Adapter not shown

Recommended Additions:

- Fiberscope**
Gain visual access into compartments through openings as small as 1/4" (6mm).
- Dual Mode Thermal Camera**
Locate hidden compartments by detecting a change in temperature.

SYSTEM PART NUMBERS:

WA - VSAS 14¹

DISPLAYS

WS=Detached WalkAbout
 WA=Standard WalkAbout

1) Add an '-N' to specify power supply blades for the US, UK, Europe, China, Australia, otherwise supplied with US blades only.





WalkAbout III Monitor

Display Size & Weight	Standard: 6.9"W x 9.4"H x 3.7"D / 3.5 lbs. (17.6 x 24 x 9.4cm / 1.58kg) Detached Base: 5.5"W x 3.7"H x 2.7"D / 1.5 lbs. (13.9 x 9.4 x 6.9cm / .66kg); LCD: 6.6"W x 7.5"H x 1.3"D / 2.5 lbs. (16.9 x 19.1 x 3.5cm / 1.13kg)
Construction	Rubber encapsulated aluminum case for shock resistance and weatherproofing
Display Size	5.6" (14.2cm) measured diagonally
Resolution	640 x 480
Operating Temperature	-4°F to 158°F (-20°C to 70°C)
LCD Controls	Brightness, contrast, color, tint, mirror, backlight & sharpness
Mounting Options	Display can be worn on vest, belt or harness; detached display can also be handheld
Video Format	Auto switches between NTSC (American) or PAL (European)
Charger	12VDC from either power supply or vehicle adapter
Batteries	NiMH, 7.2V, 2.7AH
Discharge Time/ Charge Time	2 hrs. with LEDs off / 2 hrs. when fully discharged
Base Controls & Indicators	On/Off switch & LED; Camera illumination control & LED; Low battery LED;
Connections	Camera (pole), A/V output, DC input (7.2V to 12V)

Cameras

Model	LLC-1.4 Camera	WPC-3.5
Construction	Submersible enclosure with hard-coated window	Submersible, non-conductive enclosure with hard-coated window
Size & Weight	1.6"D x 2.8"L / .28 lbs (4.1 x 7.1cm / .13kg)	2.5"D x 2.6"L / .36 lbs. (6.4 x 6.6cm / .16kg)
Features	9 Bright white LED illuminated, color camera, 480K pixels, .15 lux, 6.0mm lens, 47° FOV	24 Bright white LED illuminated, color camera, 380K pixels (438K/PAL), .05 lux, 3.6 mm, 92° FOV

Under Vehicle Inspection Sled/Under Vehicle Inspection Trolley

Model	SLED	UVIT
Construction	2 Section telescoping fiberglass detachable handle (RW). Durable, chemical resistant sled (SLED-BASE)	2 Section telescoping fiberglass detachable handle (RW). Rugged aluminum trolley with 4 wheels on Trolley.
Collars	Rugged, break-proof, easy grip, twist collars for each pole section.	
Articulation	Rotating handle rotates camera	
Collapsed/ Extended Length	Rigid Wand (RW): 4 ft / 6 ft 10 in. (1.2M / 2.08M); Trolley (UVIT): 1ft. 9 in. (.53M); SLED: 1 ft 3 in. (.53M)	
Weight	3.9 lbs. (combined) (1.77kg)	6.8 lbs. (combined) (3.1kg)

Poles

Model	B-FNS	T-FNS-14
Construction	Fixed length fiberglass pole with hand grip	4 Section fiberglass telescoping
Collars	None	Rugged, break-proof, easy grip, twist collars for each pole section.
Articulation	1 ft. flexible gooseneck can be flexed into any position	
Collapsed/ Extended Length	1ft. 3in. / 2ft. 1in. (1.3M / 2.6M)	4 ft. / 13 ft. 11 in. (1.22M / 4.24M)
Weight	1.4 lbs. (2.9kg)	5.3 lbs. (2.4kg)

Case

Model	V-CASE
Construction	Rugged, watertight, plastic carry case with foam inserts with compartments for all components.
Size	53" x 17" x 6" (135 x 43 x 15cm)
Weight loaded	47 lbs. (21.3kg)



System Contents:

- WM-5.6 WalkAbout III**[®] - 5.6" LCD Display
 - LLC-1.4** - Two (2) Low Light Color Cameras
 - WPC-3.5** - Wide Angle Color Cameras
 - B-FNS** - 2' Baton
 - T-FNS-14** - 14' Telescoping Pole
 - RW** - 6' Rigid Wand for UVIT or SLED
 - SLED** - Under Vehicle Inspection Sled
 - BAT-2** - Two (2) NiMH Rechargeable Batteries
 - WBC** - Battery Charger (Power Supply not shown)
 - V-CASE** - Custom Carrying Case
 - WUH** - Universal Chest Harness
 - SS-WA-5.6** - Sunshade (Not shown)
- A/V Cable & Vehicle Power Adapter not shown

Recommended Additions:

- Fiberscope**
Gain visual access into compartments through openings as small as 1/4" (6mm).
- Dual Mode Thermal Camera**
Locate hidden compartments by detecting a change in temperature.

SYSTEM PART NUMBERS:

WA-VSRS14¹

DISPLAYS

WS=Detached WalkAbout
 WA=Standard WalkAbout

1) Add an '-N' to specify power supply blades for the US, UK, Europe, China, Australia, otherwise supplied with US blades only.



V-CASE

SLED



T-FNS-14

RW



STANDARD WALKABOUT



(2) LLC-1.4



B-FNS



WPC-3.5



(2) BAT-2



WBC



WUH

ALTERNATE DISPLAY CONFIGURATIONS



DETACHED WALKABOUT



WalkAbout III Monitor

Display Size & Weight	Standard: 6.9"W x 9.4"H x 3.7"D / 3.5 lbs. (17.6 x 24 x 9.4cm / 1.58kg) Detached Base: 5.5"W x 3.7"H x 2.7"D / 1.5 lbs. (13.9 x 9.4 x 6.9cm / .66kg); LCD: 6.6"W x 7.5"H x 1.3"D / 2.5 lbs. (16.9 x 19.1 x 3.5cm / 1.13kg)
Construction	Rubber encapsulated aluminum case for shock resistance and weatherproofing
Display Size	5.6" (14.2cm) measured diagonally
Resolution	640 x 480
Operating Temperature	-4°F to 158°F (-20°C to 70°C)
LCD Controls	Brightness, contrast, color, tint, mirror, backlight & sharpness
Mounting Options	Display can be worn on vest, belt or harness; detached display can also be handheld
Video Format	Auto switches between NTSC (American) or PAL (European)
Charger	12VDC from either power supply or vehicle adapter
Batteries	NiMH, 7.2V, 2.7AH
Discharge Time/ Charge Time	2 hrs. with LEDs off / 2 hrs. when fully discharged
Base Controls & Indicators	On/Off switch & LED; Camera illumination control & LED; Low battery LED;
Connections	Camera (pole), A/V output, DC input (7.2V to 12V)

Cameras			Case	
Model	LLC-1.4 Camera	WPC-3.5	Model	V-CASE
Construction	Submersible enclosure with hard-coated window	Submersible, non-conductive enclosure with hard-coated window	Construction	Rugged, watertight, plastic carry case with foam inserts having compartments for all components.
Size & Weight	1.6"D x 2.8"L / .28 lbs (4.1 x 7.1cm / .13kg)	2.5"D x 2.6"L / .36 lbs. (6.4 x 6.6cm / .16kg)	Size	53" x 17" x 6" (135 x 43 x 15cm)
Features	9 Bright white LED illuminated, color camera, 480K pixels, .15 lux, 6.0mm lens, 47° FOV	24 Bright white LED illuminated, color camera, 380K pixels (438K/PAL), .05 lux, 3.6 mm, 92° FOV	Weight loaded	43 lbs. (19.5kg)

Under Vehicle Inspection Sled		Poles	
Model	SLED	B-FNS	T-FNS-14
Construction	2 Section telescoping fiberglass detachable handle (RW). Durable, chemical resistant sled (SLED)	Fixed length fiberglass pole with hand grip	4 Section fiberglass telescoping
Collars	Rugged, break-proof, easy grip, twist collars for each pole section.	None	Rugged, break-proof, easy grip, twist collars for each pole section.
Articulation	Rotating handle rotates camera	1 ft. flexible gooseneck can be flexed into any position	
Collapsed/ Extended Length	Rigid Wand (RW): 4 ft / 6 ft 10 in. (1.2M / 2.08M); SLED: 1 ft 3 in. (.53M)	1ft. 3in. / 2ft. 1in. (1.3M / 2.6M)	4 ft. / 13 ft. 11 in. (1.22M / 4.24M)
Weight	3.9 lbs. (combined) (1.77kg)	1.4 lbs. (2.9kg)	5.3 lbs. (2.4kg)



System Contents:

- WM-5.6 WalkAbout III®** - 5.6" LCD Display
- LLC-1.4** - Two (2) Low Light Color Cameras
- WPC-3.5** - Wide Angle Color Cameras
- T-FNS-13** - 13' Telescoping Pole
- RW-8** - 8' Telescoping Rigid Wand for UVIT
- RW-FNS** - Gooseneck Extension for Rigid Wand
- UVIT** - Under Vehicle Inspection Trolley
- BAT-2** - Two (2) NiMH Rechargeable Batteries
- WBC** - Battery Charger (Power Supply not shown)
- N-CASE** - Custom Carrying Case
- WUH** - Universal Chest Harness
- VPC-10** - 7.5' Coiled Camera Cable
- SS-WA-5.6** - Sunshade (Not shown)
- A/V Cable & Vehicle Power Adapter not shown

Recommended Additions:

- Fiberscope**
Gain visual access into compartments through openings as small as 1/4" (6mm).
- Dual Mode Thermal Camera**
Locate hidden compartments by detecting a change in temperature.

SYSTEM PART NUMBERS:

WA-VSC13¹

DISPLAYS

WS=Detached WalkAbout
 WA=Standard WalkAbout

1) Add an '-N' to specify power supply blades for the US, UK, Europe, China, Australia, otherwise supplied with US blades only.



ALTERNATE DISPLAY CONFIGURATIONS



DETACHED WALKABOUT



WalkAbout III Monitor

Display Size & Weight	Standard: 6.9"W x 9.4"H x 3.7"D / 3.5 lbs. (17.6 x 24 x 9.4cm / 1.58kg) Detached Base: 5.5"W x 3.7"H x 2.7"D / 1.5 lbs. (13.9 x 9.4 x 6.9cm / .66kg); LCD: 6.6"W x 7.5"H x 1.3"D / 2.5 lbs. (16.9 x 19.1 x 3.5cm / 1.13kg)
Construction	Rubber encapsulated aluminum case for shock resistance and weatherproofing
Display Size	5.6" (14.2cm) measured diagonally
Resolution	640 x 480
Operating Temperature	-4°F to 158°F (-20°C to 70°C)
LCD Controls	Brightness, contrast, color, tint, mirror, backlight & sharpness
Mounting Options	Display can be worn on vest, belt or harness; detached display can also be handheld
Video Format	Auto switches between NTSC (American) or PAL (European)
Charger	12VDC from either power supply or vehicle adapter
Batteries	NiMH, 7.2V, 2.7AH
Discharge Time/ Charge Time	2 hrs. with LEDs off / 2 hrs. when fully discharged
Base Controls & Indicators	On/Off switch & LED; Camera illumination control & LED; Low battery LED;
Connections	Camera (pole), A/V output, DC input (7.2V to 12V)

Cameras			Case	
Model	LLC-1.4 Camera	WPC-3.5	Model	N-CASE
Construction	Submersible enclosure with hard-coated window	Submersible, non-conductive enclosure with hard-coated window	Construction	Rugged, watertight, plastic carry case with foam inserts having compartments for all components.
Size & Weight	1.6"D x 2.8"L / .28 lbs (4.1 x 7.1cm / .13kg)	2.5"D x 2.6"L / .36 lbs. (6.4 x 6.6cm / .16kg)	Size	38" x 17" x 6" (97 x 43 x 15cm)
Features	9 Bright white LED illuminated, color camera, 480K pixels, .15 lux, 6.0mm lens, 47° FOV	24 Bright white LED illuminated, color camera, 380K pixels (438K/PAL), .05 lux, 3.6 mm, 92° FOV	Weight loaded	37 lbs. (16.8kg)

Poles			
Model	UVIT (Under Vehicle Inspection Trolley)	RW-FNS	T-FNS-13
Construction	3 Section telescoping fiberglass detachable handle (RW-8). Rugged aluminum trolley with 4 wheels on Trolley.	Fixed length fiberglass pole with hand grip and no coil cord. Connect to the VPC-10 to create a Baton. Connect to the RW-8 to create a 10' gooseneck pole.	4 Section telescoping pole with internal aluminum sections and an outer fiberglass section
Collars	Rugged, break-proof, easy grip, twist collars for each pole section.	None	Rugged, break-proof, easy grip, twist collars for each pole section.
Articulation	Rotating handle rotates camera	1 ft. flexible gooseneck can be flexed into any position	
Collapsed/ Extended Length	Rigid Wand (RW-8): 3 ft / 7 ft 6 in. (.91M / 2.28M); Trolley (UVIT): 1ft. 9 in. (.53M)	1 ft. 3 in. / 2 ft. 1 in. (.38M / .64M)	3 ft. / 12 ft. 10 in. (3.9M / .91M)
Weight	7.8 lbs. (combined) (3.5kg)	1 lb. (.45kg)	4.9 lbs. (2.2kg)

System Contents:

- WM-5.6 WalkAbout III**[®] - 5.6" LCD Display
- LLC-1.4** - Low Light Color Cameras
- WPC-3.5** - Wide Angle Color Cameras
- WPC-2.5Z** - 10:1 Color Zoom Cameras
- B-FNS** - 2' Baton
- T-FNS-14** - 14' Telescoping Pole
- RW** - 6' Rigid Wand for UVIT or SLED
- UVIT** - Under Vehicle Inspection Trolley
- SLED** - Under Vehicle Inspection Sled
- BAT-2** - Two (2) NiMH Rechargeable Batteries
- WBC** - Battery Charger (Power Supply not shown)
- V-CASE** - Custom Carrying Case
- WUH** - Universal Chest Harness
- SS-WA-5.6** - Sunshade (Not shown)
- A/V Cable & Vehicle Power Adapter not shown

Recommended Additions:

- Fiberscope**
Gain visual access into compartments through openings as small as 1/4" (6mm).
- Dual Mode Thermal Camera**
Locate hidden compartments by detecting a change in temperature.



SYSTEM PART NUMBERS:

WA-VSAS14Z¹

DISPLAYS

WS=Detached WalkAbout
 WA=Standard WalkAbout

1) Add an '-N' to specify power supply blades for the US, UK, Europe, China, Australia, otherwise supplied with US blades only.

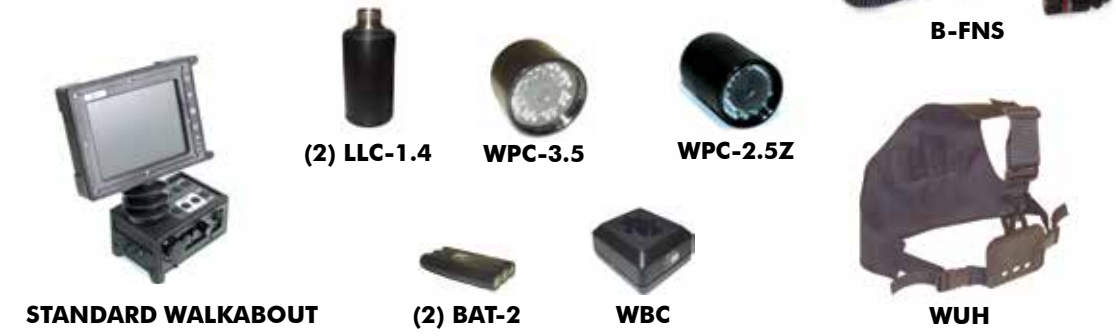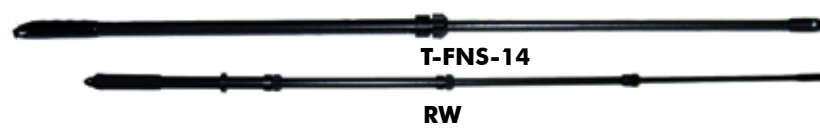

ALTERNATE DISPLAY CONFIGURATIONS



DETACHED WALKABOUT



WalkAbout III Monitor

Display Size & Weight	Standard: 6.9"W x 9.4"H x 3.7"D / 3.5 lbs. (17.6 x 24 x 9.4cm / 1.58kg) Detached Base: 5.5"W x 3.7"H x 2.7"D / 1.5 lbs. (13.9 x 9.4 x 6.9cm / .66kg); LCD: 6.6"W x 7.5"H x 1.3"D / 2.5 lbs. (16.9 x 19.1 x 3.5cm / 1.13kg)
Construction	Rubber encapsulated aluminum case for shock resistance and weatherproofing
Display Size	5.6" (14.2cm) measured diagonally
Resolution	640 x 480
Operating Temperature	-4°F to 158°F (-20°C to 70°C)
LCD Controls	Brightness, contrast, color, tint, mirror, backlight & sharpness
Mounting Options	Display can be worn on vest, belt or harness; detached display can also be handheld
Video Format	Auto switches between NTSC (American) or PAL (European)
Charger	12VDC from either power supply or vehicle adapter
Batteries	NiMH, 7.2V, 2.7AH
Discharge Time/ Charge Time	2 hrs. with LEDs off / 2 hrs. when fully discharged
Base Controls & Indicators	On/Off switch & LED; Camera illumination control & LED; Low battery LED;
Connections	Camera (pole), A/V output, DC input (7.2V to 12V)

Cameras				Under Vehicle Inspection Sled/Under Vehicle Inspection Trolley		
Model	LLC-1.4 Camera	WPC-3.5	WPC-2.5Z	Model	SLED	UVIT
Construction	Submersible, non-conductive enclosure with hard-coated window			Construction	2 Section telescoping fiberglass detachable handle (RW). Durable, chemical resistant sled (SLED-BASE)	2 Section telescoping fiberglass de-tachable handle (RW). Rugged aluminum trolley with 4 wheels on Trolley.
Size & Weight	1.6"D x 2.8"L / .28 lbs (4.1 x 7.1cm / .13kg)	2.5"D x 2.6"L / .36 lbs. (6.4 x 6.6cm / .16kg)	2.5"D x 4.0"L / .66 lbs. (6.3 x 10cm / .30kg)	Collars	Rugged, break-proof, easy grip, twist collars for each pole section.	
Features	9 Bright white LED illuminated, color camera, 480K pixels, .15 lux, 6.0mm lens, 47° FOV	24 Bright white LED illuminated, color camera, 380K pixels (438K/PAL), .05 lux, 3.6 mm, 92° FOV	3 Super bright white LED illuminated, color camera, 480 TV Lines, 5.4° to 50° FOV	Articulation	Rotating handle rotates camera	
				Collapsed/ Extended Length	Rigid Wand (RW): 4 ft / 6 ft 10 in. (1.2M / 2.08M); Trolley (UVIT): 1ft. 9 in. (.53M); SLED: 1 ft 3 in. (.53M)	
				Weight	3.9 lbs. (combined) (1.77kg)	6.8 lbs. (combined) (3.1kg)

Poles			Case	
Model	B-FNS	T-FNS-14	Model	V-CASE
Construction	Fixed length fiberglass pole with hand grip	4 Section fiberglass telescoping	Construction	Rugged, watertight, plastic carry case with foam inserts with compartments for all components.
Collars	None	Rugged, break-proof, easy grip, twist collars for each pole section.	Size	53" x 17" x 6" (135 x 43 x 15cm)
Articulation	1 ft. flexible gooseneck can be flexed into any position		Weight loaded	47 lbs. (21.3kg)
Collapsed/ Extended Length	1ft. 3in. / 2ft. 1in. (1.3M / 2.6M)			
Weight	1.4 lbs. (2.9kg)			